

Item No.

# **104** Batch Ice Cream Freezer

# Features

Serve homemade, low or medium overrun ice cream, gelato, sorbet or Italian ice. Fruits, candies, and nuts can be folded in as product is being drawn into your container. Product may be ejected at temperatures low enough for serving, depending on mix formulation, flavorings, and overrun desired.

## **Freezing Cylinder**

One, 3 quart (2.9 liter). Pre-charge of liquid mix determines overrun.

## **Automatic Timer Control**

Finished product quality is automatically controlled by setting the time required for the recipe. A buzzer will sound to remind the operator to eject the finished product.

# Funnel

Liquid mix and flavorings are poured into the top, using the convenient funnel provided.

750 N. Blackhawk Blvd. Rockton, Illinois 61072 800-255-0626 Phone 815-624-8333 Fax 815-624-8000 www.taylor-company.com info@taylor-company.com

ISO 9001:2015 Registered Firm



Standard 6




Selected 50/60

Hz. Models

104



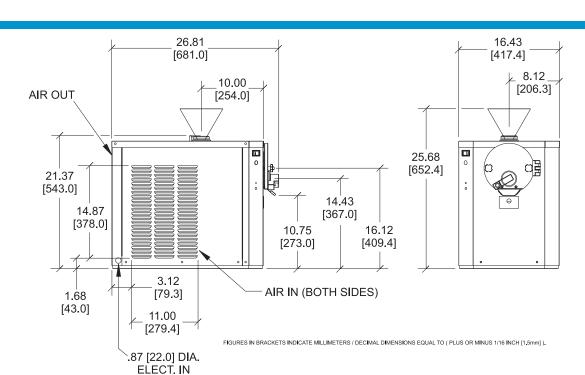

 Ibs.
 kgs.

 165
 74.9

 202
 91.6

	cu. ft.	cu. m.
Volume	17.4	0.49
Dimensions	in.	mm.
Width	16-7/16	418
Depth	26-13/16	681
Height	21-3/8	542
Counter Clearance		
Designed to rest on a plastic pa	d diractly on countertan	

Designed to rest on a plastic pad directly on countertop.

Electrical	cal Maximum Minimum		Poles (P)	
	<b>Fuse Size</b>	<b>Circuit Ampacity</b>	Wires (W)	
115/60/1 Air	30	26	2P 3W	
208-230/60/1 Air	20	15	2P 3W	
220-240/50/1 Air	20	14	2P 3W	

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements. (For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

<b>Bidding Specs</b>					
Electrical: Volt		Hz_	ph		
Neutral:	□Yes	□No	Cooling: 🗆 Air	□Water	□NA

#### **Options**:

Weights

Net

Crated

\*For reference only

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor distributor.

#### **Authorized Taylor Distributor**

## **Specifications**

#### Electrical

One dedicated electrical connection is required. See the electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for cord and receptacle specifications as local codes allow.

#### **Beater Motor**

One, 1.0 hp.

### **Refrigeration System**

One, approximately 4,800 BTU/hr. R449A. (BTUs may vary depending on compressor used.)

#### Air-Cooled

Minimum clearance: 6" (152 mm) around all sides. Minimum air clearances must be met to ensure adequate airflow for optimum performance.



750 N. Blackhawk Blvd. Rockton, Illinois 61072 www.taylor-company.com

051275-ADV 05/20