


ICE SERIES

ICE1506HR49



Features and Benefits

- Harvest Assist provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.
- Durable, electroless nickel plating on all evaporator plates ensures reliability.
- Constructed from corrosion-resistant stainless steel.
- Comes equipped with ice level and ice deflectors for both bin and dispenser applications.
- High production 30" wide cuber.
- Pairs with the RC306C49 remote condenser and precharged linesets: RL49-25, RL49-40, and RL49-75..



ICE FORMS	
HALF CUBE	3/8 x 7/8 x 7/8 in.
	10 x 22 x 22 mm



BIN CHART									
Model #	B40	B42	B55	B700-30	B110	B1000-48	B1300-48	B1325-60	B1660-60
capacity	344 lbs (156 kg) 30 in (762 mm)	351 lbs (160 kg) 22 in (559 mm)	510 lbs (232 kg) 30 in (762 mm)	680 lbs (308 kg) 30 in (762 mm)	854 lbs (388 kg) 48 in (1,219 mm)	1,000 lbs (454 kg) 48 in (1,219 mm)	1,320 lbs (599 kg) 48 in (1,219 mm)	1,325 lbs (601 kg) 60 in (1,524 mm)	1,660 lbs (753 kg) 60 in (1,524 mm)
Kit for combining wider bins with smaller models	Kit Not Required	Not Compatible	Kit Not Required	Kit Not Required	BPF-1	Kit Not Required	Kit Not Required	Kit Not Required	Kit Not Required

See Ice-O-Matic Price List for Adapter Kits to combine ice makers with most available ice/beverage dispensers.



ICE1506HR49 shown atop of bin B55 (sold separately)

Warranty

- Ice Maker: **3 Years Parts and Labor**
- Evaporator and Compressor: **5 Years Parts**
- Evaporator: **7 Years Parts and Labor**
(if enrolled in the filter program for US & Canada)

Options & Accessories

- KCUBEDISPB for ice level control for a dispenser - verify adaptor with disp. manufacturer
- RC306C49 remote condenser

Water Filter

- Manifold System IFQ2 gets replacement filter IOMQ (2)




Ice-O-Matic

ICE SERIES


ICE1506HR49

Line drawing note: Numbers with quote symbol " are in inches. Numbers enclosed in [brackets] are in millimeters.



PLAN / TOP VIEW

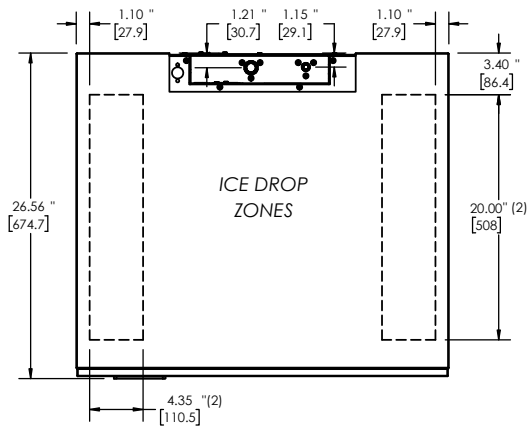

ELEVATION / FRONT VIEW

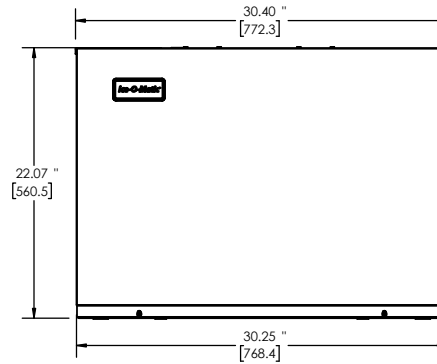

UTILITIES / BACK VIEW

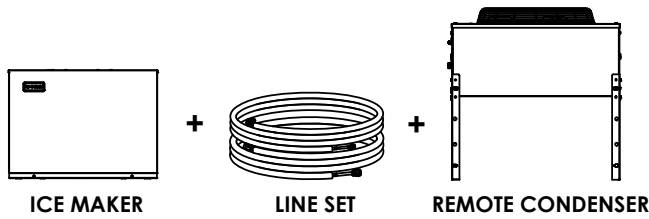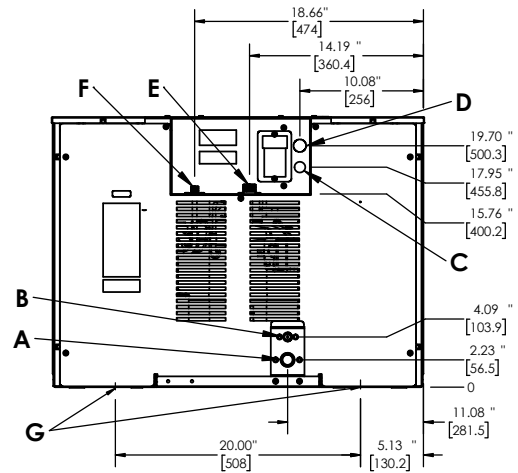

Remote Cooled

- A. Ice Maker Drain, 3/4" FPT
B. Ice Maker Potable Water Inlet, 3/8" FPT
C. Electrical Connection, 7/8" Hole
D. Remote Condenser Electrical, 7/8" Hole
E. Remote Condenser Discharge Line, 1/2" male quick connect for line set
F. Remote Condenser Liquid Line, 3/8" male quick connect for line set
G. Ice Maker Mounting Holes, Underside

Table with 3 columns: Model, Specifications, and Ice Production/Water Usage. Includes rows for Condensing Type, Voltage, Min. Circuit Amp, Max Breaker Size, kWh per 100 lbs of ice, BTU, Number of Wires, Refrigerant, and Refrigeration Charge.

Table with 3 columns: Operating Requirement, Minimum, and Maximum. Includes rows for Ambient Temp. Range Air, Water Temp, and Water Pressure.

Table with 3 columns: Dimension, Unit Width, and Unit Depth/Height. Includes rows for Unit Width, Unit Depth, Unit Height, Shipping Weight, Shipping Dimensions (in.), and Shipping Dimensions (mm).

