



HOSHIZAKI

CERTIFICATION



HACCP International



ISO9001



Compliant with
IEC60335-2-89 Standard

RT-186MC-S-3D

UNDERCOUNTER REFRIGERATOR



Key Features



Lower running cost




Powerful cooling
performance



Self Closing Door



Removal door gaskets



Round Interior Corners



Large and clear display




Drainage-Free Design



LED lighting



Dimensions & Specifications

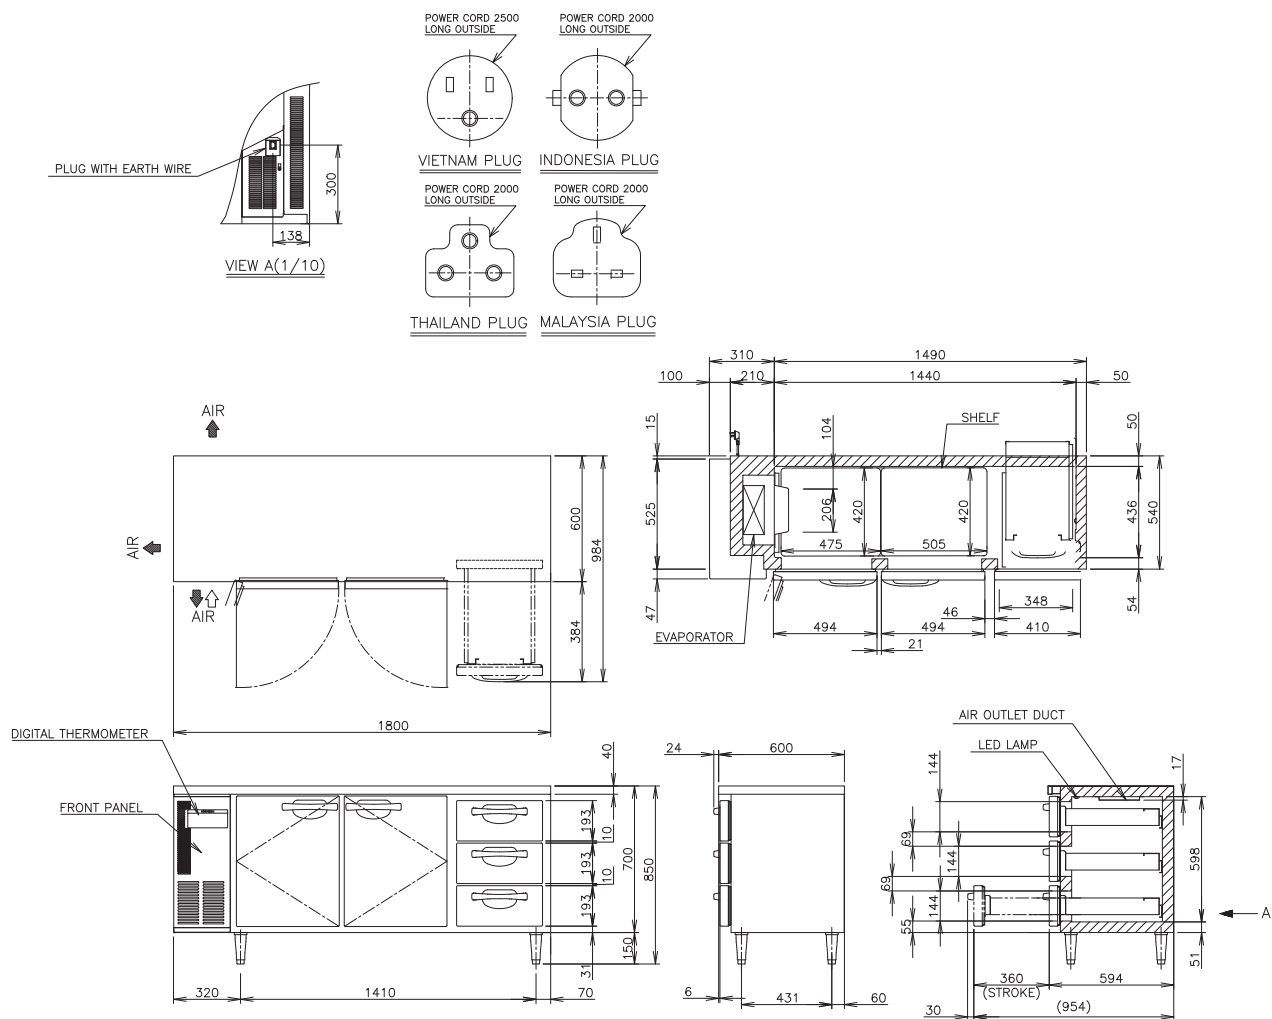

MODEL	RT-186MC-S-3D
POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.41kVA (1.86A)
ELECTRIC CONSUMPTION	228W
TEMPERATURE CONTROL	-6 to 12°C
STORAGE CAPACITY	407L
WEIGHT	Net: 103kg (Gross: Approx. 115kg)
OUTSIDE DIMENSIONS	1800mm(W)× 600mm(D)×850(-880)mm(H)
PACKAGE	Carton: 1865mm(W)×680mm(D)×845mm(H)
NUMBER OF SHELVES	4
NUMBER OF DRAWERS	3
GN TRAYS TYPE	1/1 GN Compatible Drawers - Max. Depth 100mm
ACCESSORY	GN tray is not included
REFRIGERANT	R290
OPERATING CONDITIONS	Ambient Temperature: 5 - 38°C, Voltage Range: Rated Voltage ±6%



HOSHIZAKI

HOSHIZAKI VIETNAM CORPORATION

168/14 Nguyen Gia Tri, Thanh My Tay Ward, Ho Chi Minh City
Vietnam 760000

TEL +84 0 916 161 346 <https://hoshizaki-sea.com/>

